

The Event 100T is a 100Watt WW + 100Watt CW powered LED fresnel with zoom function. The RDM-DMX compliant, 25 - 65 degree manual zoom along with it’s superior 95 CRI make this fixture a good replacement for the tradi-tional fresnels.


Key features:

- 100Watt WW + 100W CW COB white LED
- 2700K - 6000K tunable color temperature
- Average CRI 95, TLCI 97
- Soft and even wash effect
- 25° - 65° manual zoom
- Smooth dimming, flicker free
- DMX, RDM control
- Dimmer curves selectable
- Silent operation for studio and theatre


Application:

- Broadcast, HD studio
- Theatre, chruch
- Film shooting
- Museum
- Exhibition lighting

Accessories:




Barn door




Gel frame

EVENT 100T
100W tunable LED fresnel zoom

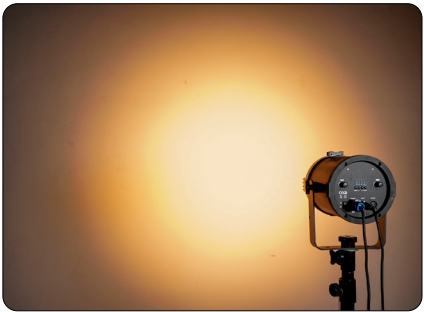

Photometric


WW(lx)	16700	5560	2230	1280	785
CW(lx)	23700	7530	2980	1750	1080
Full on(lx)	19000	6260	2530	1490	853

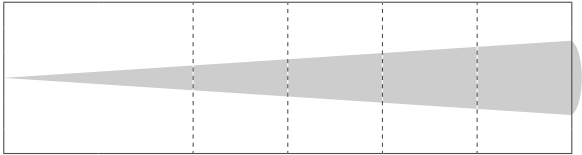

Distance(m)	1	2	3	4	5
Spot Diam(m)	0.55	1.11	1.66	2.22	2.77

Min. Spot - 25°


Color Rendition - 2700K

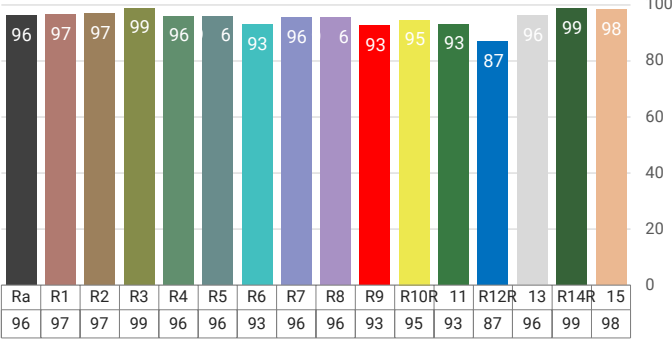

Technical Data


Power supply:	AC100-240V, 50/60Hz
Light source:	100Watt WW + 100W CW LED
Color temperature:	2700K - 6000K
Zoom range:	25° - 65° manual zoom
Color Rendition:	Average CRI 95, TLCI 97
Power connection:	PowerCON in & out
Signal connection:	3-pin XLR in & out
Control channels:	1/2/3/5
Control mode:	DMX and RDM

WW(lx)	4170	1390	547	318	214
CW(lx)	5670	1860	734	437	360
Full on(lx)	4680	1580	621	361	240

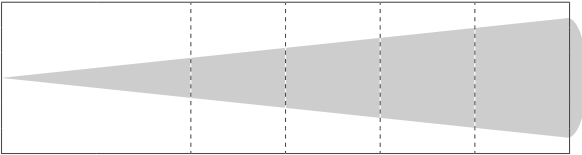

Distance(m)	1	2	3	4	5
Spot Diam(m)	1.7	3.4	5.1	6.8	8.5

Max. Spot - 65°

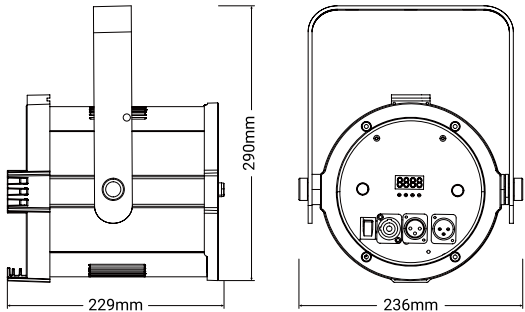

Dimmer speed:	4 grade
Housing:	Colour black, Aluminum
Size:	229 x 236 x 290mm
N.W.:	3.6 kg(barn door incl.)
G.W.:	4.5 kg
Accessories(incl.):	Power cable, barn door, gel frame, safety rope
Accessories(opt.):	Clamp
Compliance:	Pending
Environment:	IP20