



Gallery 50T Spot 5060

50W tunable LED profile spot 50 - 60D

Gallery 50T Spot 5060 is a 50W tunable COB LED profile spot with 50 - 60 degree zoom lens. Aluminum housing, fan-free design. With 50° - 60° camera lens like HD zoom lens, color temperature adjustable from 2700K - 6000K. It's an idea product for art gallery, museum, shopping mall.

Key features:

- 50W WW + 50W CW constant output LED
- 2700K - 6000K adjustable
- High CRI over 92
- Die-casting aluminum housing
- 50° - 60° zoom lens, no lens distortion
- Smooth dimming, flicker free
- DMX built in, no external box
- DMX control of dimmer, RDM support
- Built in gobo holder
- Available in black or white color
- Track version optional


Application:

- Museum
- Theatre, church
- Shopping mall
- Art gallery
- Restaurant




Photometric 50° - 60°

WW(lx)	663	178	77	46	29
CW(lx)	692	182	79	47	30
Full on (lx)	851	224	98	58	37

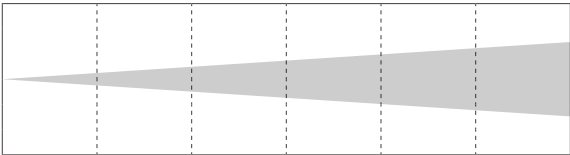

Distance(m)	1	2	3	4	5
Spot Diam(m)	0.93	1.87	2.80	3.73	4.66


Color rendition

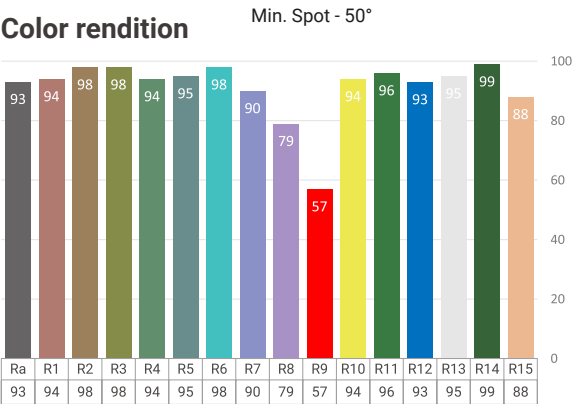

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	50W WW + 50W CW LED
Color temperature:	2700K - 6000K adjustable
Zoom range:	50° - 60° manual zoom
Color Rendition:	Avg. CRI 92
Power connection:	Dedicated power in
Signal connection:	3-pin XLR in & out
Control channels:	1/2/3/5

WW(lx)	535	141	61	37	24
CW(lx)	534	144	62	38	24
Full on (lx)	689	180	77	46	30

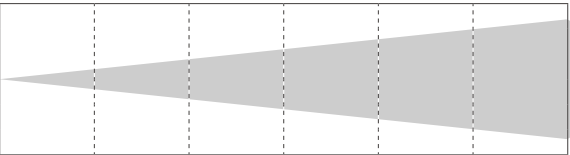

Distance(m)	1	2	3	4	5
Spot Diam(m)	1.15	2.30	3.45	4.60	5.75

Max. Spot - 60°

Control mode:	DMX, RDM
Housing:	Color black or white, aluminum
Size:	298 x 146 x 106mm
N.W.:	1.75 kg
Accessories(incl.):	Power cable, Y split DMX cable, Safety rope
Accessories(opt.):	Clamp
Environment:	IP20