


P19

P19 is a 19pcs x 15Watt RGBW 4in1 LED par light with motorized zoom. The LEDs can be controlled in 3 separate zones. It's full aluminum housing, 15° - 60° zoom range, high brightness output, light weight body makes it easy to handle and install. The fixture also come with powercon in & out connection and LCD display.

Key Features:

- 19 x 15W 4in1 LEDs
- RGBW LED color mixing
- Motorized zoom from 15° - 60°
- 3 separate LED zones controllable
- Auto, master-slave, sound activate operation
- Full aluminum housing
- 5/10/16/32 DMX channels
- Powercon in & out connection, fixtures linkable
- Various built-in color macros
- Flicker free for TV and Film
- Double bracket design
- Control panel with LCD display

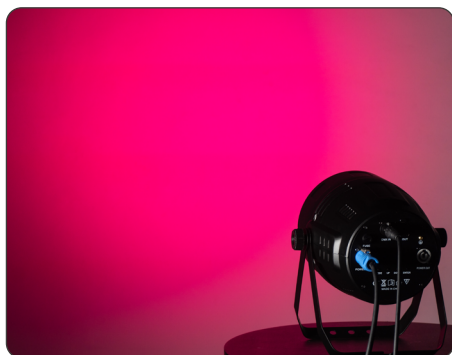

PHYSICAL

Length: 280 mm (11 in.)
Width: 215 mm (8.5 in.)
Height: 330 mm (13 in.)
Net Weight: 4.5 kg (9.9 lb.)

DYNAMIC EFFECTS

Color mixing: RGBW 4in1 LEDs
Three separate LED zones controllable
Zoom: 15° - 60° motorized
Electronic dimming: 0 - 100%
Strobe and pulse effects: Variable speed and action, random strobe

CONTROL AND PROGRAMMING

Control options: DMX 512, auto program, sound, master-slave
DMX channels: 5/10/16/32
DMX address setting: Control panel with LCD display
DMX compliance: USITT DMX512-A

OPTICS

Light source: 19 x 15Watt LEDs
LED lifetime: 50,000 hours avg.*

*LED Life may vary depending on several factors including but not limited to: Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control, and Dimming

CONSTRUCTION

Housing: Aluminum
Color: Black
Environment: IP20 indoor use

INSTALLATION

Location: Dry location only, must be fastened to surface or structure
Orientation: Any
Minimum distance to combustible materials: 0.3 m (1.0 ft.)

Minimum distance to illuminated surfaces: 3 m (9.8 ft.)

CONNECTIONS

AC power in, thru: PowerCon in & out
DMX data in/thru: 3-Pin XLR in & out(5-Pin optional)

ELECTRICAL

AC power: 100-240 V nominal, 50/60 Hz
Power supply unit: Auto ranging power unit

TYPICAL POWER AND CURRENT

230 V, 50 Hz: 230Watt max.
Allow for a deviation of +/- 10%.

THERMAL

Cooling: Forced ventilation with fans
Maximum ambient temperature (Ta max.): 40° C (104° F)
Minimum ambient temperature (Ta min.): 5° C (41° F)

SHIPPING INFORMATION

In carton:

Carton dimensions: 280 x 280 x 390 mm (11 x 11 x 15.4 in.)
Gross weight: 5 kg (10 lbs.)