



Panto Leko 60 is a 60W tunable COB LED profile spot. Die-casting housing, fan-free design. With 15° - 30° and 25° - 40° zoom lens optional, color temperature adjustable from 2700K - 6000K. It's an idea product for art gallery, museum, shopping mall.


Key features:

- 60W WW + 60W CW constant output LED
- 2700K - 6000K adjustable
- High CRI over 92
- Die-casting aluminum housing, fan-free
- 15° - 30° and 25° - 40° zoom lens optional
- Smooth dimming, flicker free
- Compact body, easy to set up
- DMX control of dimmer
- RDM function available
- IP65, indoor or outdoor use

Application:

- Museum
- Theatre, church
- Shopping mall
- Art gallery
- Restaurant

Accessories:




PANTO LEKO 60

60W tunable LED profile spot



Photometric 15° - 30°

WW(lx)	13500	3180	1330	775	500
CW(lx)	17800	4160	1750	1020	652
Full on (lx)	15400	3570	1490	873	560

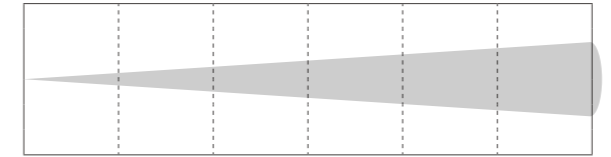


Distance(m)	1	2	3	4	5
Spot Diam(m)	0.26	0.67	1.00	1.34	1.67

Min. Spot - 15°

Photometric 25° - 40°


WW(lx)	7360	1440	623	341	224
CW(lx)	9920	1910	862	463	300
Full on (lx)	8550	1700	733	404	257

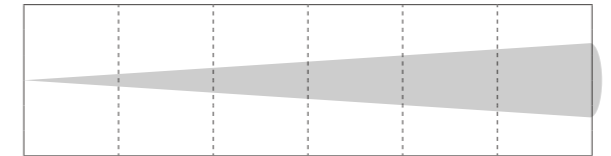

Distance(m)	1	2	3	4	5
Spot Diam(m)	0.44	0.89	1.33	1.77	2.22

Min. Spot - 25°


WW(lx)	6930	1650	721	418	273
CW(lx)	900	2140	936	517	351
Full on (lx)	7830	1840	812	468	308

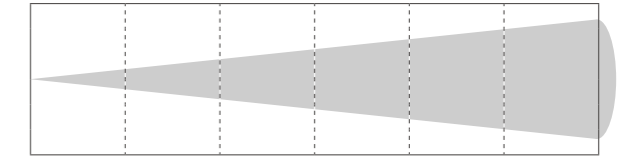

Distance(m)	1	2	3	4	5
Spot Diam(m)	0.54	1.11	1.66	2.21	2.77

Max. Spot - 30°

WW(lx)	5460	915	405	235	162
CW(lx)	5430	1260	558	323	209
Full on (lx)	4620	1080	467	281	183

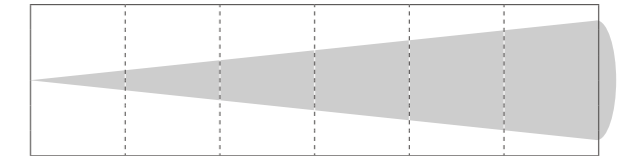

Distance(m)	1	2	3	4	5
Spot Diam(m)	0.73	1.45	2.18	2.90	3.63

Max. Spot - 40°

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	60W WW + 60W CW LED
Color temperature:	2700K - 6000K adjustable
Zoom range:	15° - 30°, 25° - 40° optional
Color Rendition:	Avg. CRI 92
Power connection:	Powercon True1 in
Signal connection:	3-pin XLR in & out
Control channels:	1/2/3/5

Control mode:	DMX, RDM
Housing:	Color black, die-casting aluminum
Size:	344 x 164 x 276mm
N.W.:	3 kg
G.W.:	4 kg
Accessories(incl.):	Power cable, Gel frame
Accessories(opt.):	Gobo holder, Clamp, Safety rope
Environment:	IP65