




Reborn 200 is a LED retrofit for Source 4 profile. Upgrade your source 4 profile in just seconds. Features high CRI, bright output and low heat, energy save, clean and even light field, RDM function, long life LED, LCD display, XLR in & out, 100-240V worldwide voltage.

- Key features:**
- 175W LED light source, equivalent of 575W lamp
 - Color temperature 3200K, 4000K, 5600K optional
 - CRI≥98, R9≥93, TLCI 98 (3200K), CRI 90+ (4000K, 5600K)
 - 3-pin XLR in & out signal connection(5 pin optional)
 - Dimmer curves selectable
 - Studio mode for super silent operation
 - Wide voltage range 100-240V
 - Dimmer frequency 1.2 - 20.0KHz
 - Smooth dimming, video flicker free
 - LCD display, user friendly interface
 - Easy to setup, seconds to upgrade
 - Intelligent temperature control, silent operation

- Application:**
- Broadcast, HD studio
 - Theatre, church
 - Fashion show
 - Museum



Scan for video

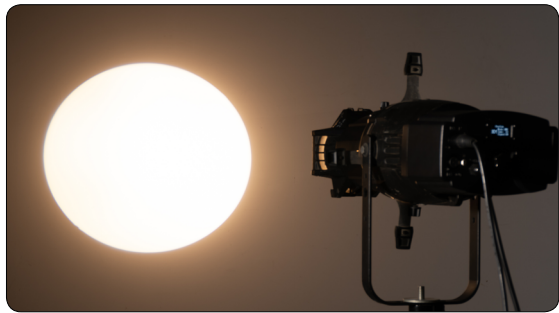


REBORN 200


Source 4 LED retrofits




Photometric

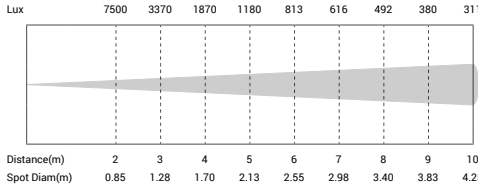

26° - 3200K

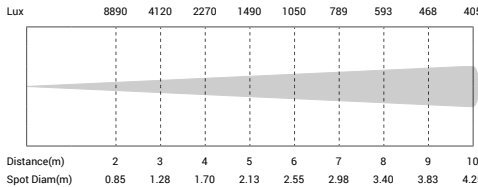


26° - 4000K

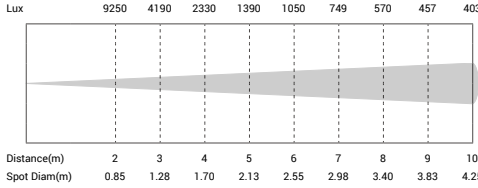

26° - 5600K


Color Rendition

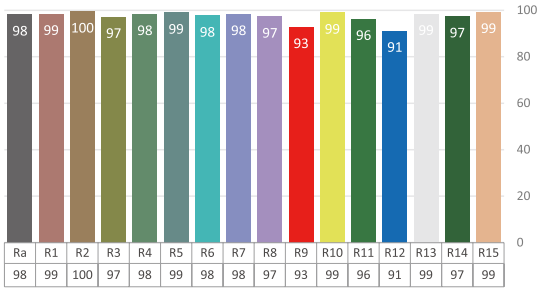

3200K

Technical Data

Power supply:	AC100-240V, 50/60Hz
Light source:	175W COB LED
Color temperature:	3200K, 4000K, 5600K optional
Color Rendition:	CRI 98, R9≥93, TLCI 98(3200K), CRI 90+ (4000K, 5600K)
Power connection:	Dedicated power in
Signal connection:	3-pin XLR in & out(5-pin optional)
Control channels:	1
Dimmer frequency:	1.2 KHz, 1.6 KHz, 2.4 KHz, 4.0 KHz, 6.0 KHz, 20.0 KHz
Dimmer curves:	Standard, Stage, TV, Architecture, Theatre, Studio(fan mode), Custom
Control mode:	DMX, RDM
Housing:	Color black, Die-cast aluminum
Size:	195 x 141 x186 mm
N.W.:	3 kg
Accessories(incl.):	Power cable, fix bolt
Environment:	IP20

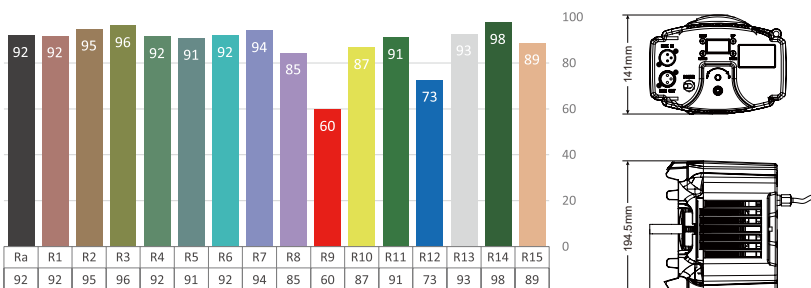

4,000K, 5600K

