



HONOR 250C ZOOM

250W RGBW profile zoom

The Honor 250C Zoom is a 250W LED profile spot with RGBW color mixing. A good replacement of the tungsten source. The 18-38° all-in-one zoom range covers the most regular 19°, 26°, 36° lens.




Key features:

- 250W RGBW LED
- 3000K ~ 8000K color temp
- HQ optical system, clean shutter cuts beam
- 18-38° "all-in-one" zoom range
- Smooth dimming, flicker free
- Rotary, Key, DMX control of dmmr
- Intelligent temperature control
- Engine and lens compatible with industry standard

Application:


- Theatre, chrucl
- Museum
- Exhibition lighting

Accessories:

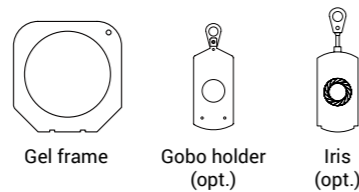

Photometric


| | | | | | | | |
|-------------|------|------|------|------|------|-----|-----|
| R(lx) | 680 | 365 | 263 | 222 | 176 | 135 | 63 |
| G(lx) | 119 | 654 | 489 | 422 | 337 | 254 | 117 |
| B(lx) | 282 | 162 | 118 | 95 | 78 | 54 | 29 |
| W(lx) | 1940 | 1060 | 817 | 695 | 562 | 425 | 197 |
| Full on(lx) | 3840 | 2100 | 1580 | 1380 | 1100 | 839 | 390 |

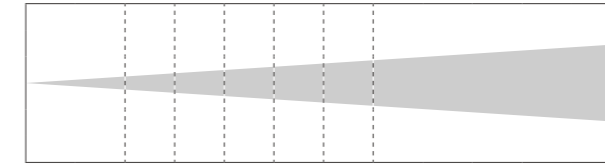

| | | | | | | | |
|--------------|------|------|------|------|------|------|------|
| Distance(m) | 5 | 6 | 7 | 8 | 9 | 10 | 15 |
| Spot Diam(m) | 1.49 | 1.79 | 2.09 | 2.39 | 2.69 | 2.99 | 4.48 |


Min. Spot - 18°

| | | | | | | | |
|-------------|------|-----|-----|-----|-----|-----|----|
| R(lx) | 234 | 164 | 112 | 85 | 68 | 56 | 27 |
| G(lx) | 414 | 281 | 207 | 160 | 126 | 102 | 52 |
| B(lx) | 101 | 64 | 53 | 42 | 30 | 24 | 13 |
| w(lx) | 682 | 450 | 345 | 263 | 213 | 125 | 89 |
| Full on(lx) | 1330 | 879 | 672 | 513 | 411 | 350 | 65 |

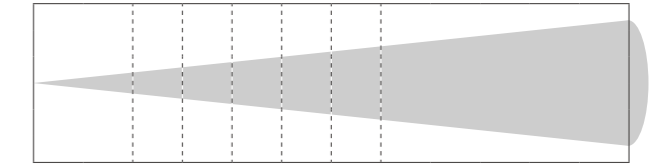

| | | | | | | | |
|--------------|------|------|------|------|------|-----|------|
| Distance(m) | 5 | 6 | 7 | 8 | 9 | 10 | 15 |
| Spot Diam(m) | 2.85 | 3.42 | 3.99 | 4.56 | 5.13 | 5.7 | 8.55 |

Max. Spot - 38°

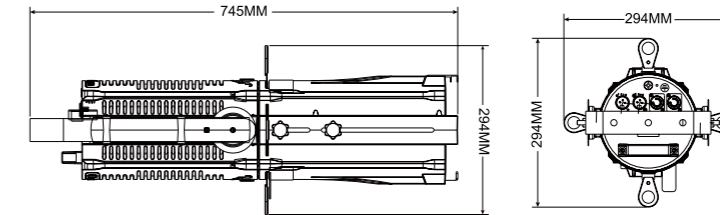

Technical Data

| | | | |
|--------------------|--|---------------------|-------------------------------------|
| Power supply: | AC100 - 240V, 50/60Hz | Housing: | Color black, engineering plastic |
| Light source: | 250W LED | Size: | 745 x 294 x 294mm |
| Color mixing: | RGBW | Package(carton): | 790 x 350 x 360mm |
| Color temperature: | 3000K ~ 8000K tunable | N.W.: | 8.7 kg |
| Zoom range: | 18°-38° , 5°-10° , 9°-18° optional | G.W.: | 11.5 kg |
| Power connection: | PowerCON in & out | Accessories(incl.): | Power cable, Gel frame, Safety rope |
| Signal connection: | 3-pin XLR in & out(5-pin optional), Net in & out(opt.) | Accessories(opt.): | Gobo holder, Clamp |
| Control channels: | 1/4/6/10 | GOBOSize: | OD 58mm, image area 50mm |
| Control mode: | Rotary, DMX, RDM | Compliance: | CE |
| | | Environment: | IP20 |

THEATRICAL LIGHTING

THEATRICAL LIGHTING