

- 3200K/5600K
- RDM Control
- COB 300W LED
- ZOOM
- Flicker Free
- 98 TLCI
- 97 CRI
- ARNet Optional

Powered by 300W 3200K or 5600K LED, the Honor 300 Zoom is designed to replace the 1K Tungsten Halogen profile light. The 18-38° "all-in-one" zoom range covers the most regular 19°, 26°, 36° lens. It creates a flat and even field of light and crisp pattern projection.


Key features:

- 300W COB white LED
- CRI 97, R9≥90, TLCI up to 98
- HD optical system, clean shutter cuts beam
- 18-38° "all-in-one" zoom range
- 16 bit dimming via DMX
- Flicker free with selectable PWM
- Rotary, key, DMX control of dimmer
- Silent operation for studio and theatre use
- Artnet version optional
- Engine and lens compatible with industry standard


Application:

- Broadcast, HD studio
- Theatre, church
- Fashion show
- Museum
- Exhibition lighting

Accessories:



Gel frame



Gobo holder (opt.)



Iris (opt.)

HONOR 300 ZOOM

WW / CW



300W LED profile zoom



Artnet ver. opt.



Photometric

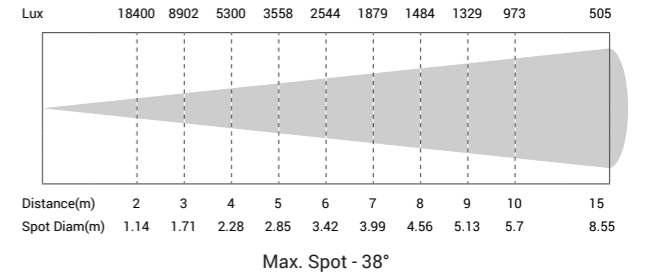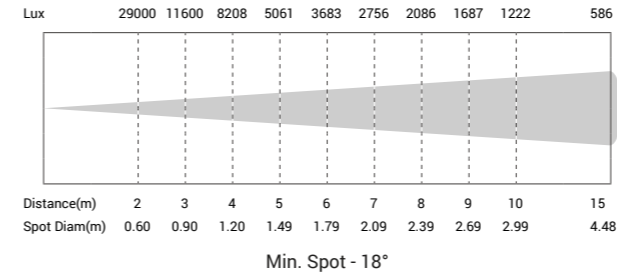


Color Rendition



Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	300W COB LED
Color temperature:	3200K or 5600K
Zoom range:	18°-38°, 5°-10°, 9°-18° optional
Color Rendition:	CRI 97, R9≥90, TLCI 98, CQS 94
Power connection:	PowerCON in & out
Signal connection:	3-pin XLR in & out(5-pin opt.), Net in & out(opt.)
Control channels:	1/2/3
Control mode:	Rotary, DMX, RDM and Art-Net(optional)
Housing:	Color black, engineering plastic

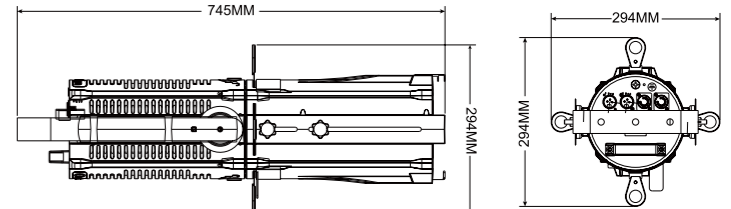

Size:	745 x 294 x 294mm
Package(carton):	790 x 350 x 360mm
N.W.:	8.7 kg
G.W.:	11.5 kg
Accessories(incl.):	Power cable, gel frame, Safety rope
Accessories(opt.):	Gobo holder, Clamp
GOBOSize:	OD 58mm, image area 50mm
Compliance:	CE
Environment:	IP20