



The Mini Fresnel 50TZ is a compact LED fresnel and powered by 50W warm white and 50W cold white tunable LED. 25° ~ 80° zoom, 95CRI, 90 R9, rotary control of dimmer. It deliver a smooth, soft flat field of light. Barn door included for the shape of the light.


Key features:

- 50W warm white + 50W cool white
- 2700K ~ 6500K tunable
- CRI 95, R9≥90, TLCI 98, CQS 96
- 25° - 80° manual zoom
- Smooth dimming, flicker free
- Super compact, easy for set up
- Rotary, key, DMX control of dimmer
- DMX-RDM compliant
- 4-leaf rotatable barndoor included
- Track mount version selectable

Application:


- News interview
- Micro film shooting
- Small event
- Wedding shooting
- Exhibition lighting

Accessories:




MINI FRESNEL 50TZ

50W tunable fresnel zoom



Photometric


WW(lx)	6419	2986	946	543	352	240
CW(lx)	8804	2843	1312	759	495	329
Full on(lx)	7063	2216	1069	610	396	270

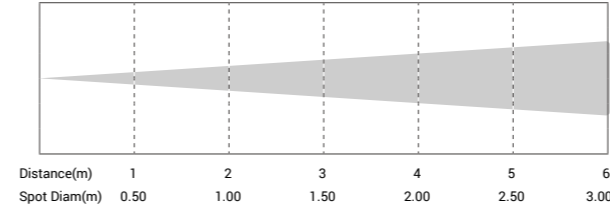

Distance(m)	1	2	3	4	5	6
Spot Diam(m)	0.50	1.00	1.50	2.00	2.50	3.00

Min. Spot


WW(lx)	1955	602	291	165	114	80
CW(lx)	2688	866	395	230	155	110
Full on(lx)	2150	698	319	185	126	90

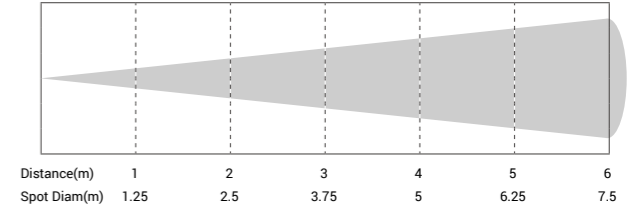

Distance(m)	1	2	3	4	5	6
Spot Diam(m)	1.25	2.5	3.75	5	6.25	7.5

Max. Spot


Color Rendition

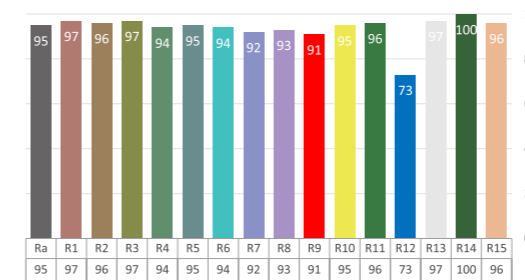

Technical Data

Power supply:	AC100-240V, 50/60Hz
Light source:	50W WW + 50W CW
Color temperature:	2700K ~ 6500K tunable
Zoom range:	25° - 80° manual zoom
Color Rendition:	CRI 95, R9≥90, TLCI 98, CQS 96
Power connection:	PowerCON in
Signal connection:	3-pin XLR in & out(5-pin optional)
Control channels:	1/2/3/5
Control mode:	DMX, RDM, Rotary

Spectrum

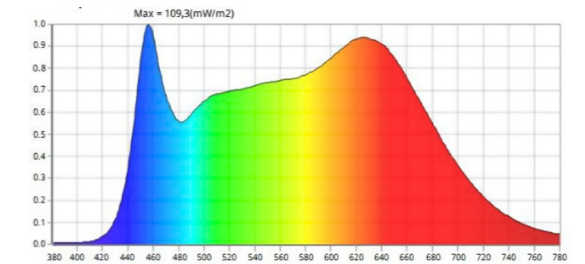

Housing:	Colour black, Aluminum
Size:	230 x 156 x 279mm
Package(carton):	335 x 218 x 220mm
N.W.:	2.2 kg(barn door incl.)
G.W.:	2.8 kg
Accessories(incl.):	Power cable, barn door, Gel frame
Accessories(opt.):	Clamp, Safety rope
Compliance:	CE
Environment:	IP20

THEATRICAL LIGHTING

THEATRICAL LIGHTING