



PAR MASTER C1

150W LED RGBW zoom par

Powered by 150W RGBW LED, the Par Master C1 is designed to replace the traditional lamp par. Featuring manual zoom range from 25°-80°, durable LED life, compact design, flat and even field of light.

Key features:

- 150W LED
- RGBW color mixing
- Flat and even color mixing
- Manually zoom, range from 25°-80°
- DMX-RDM compliant
- Video flicker free
- Four leaf rotatable barndoor

Application:


- Theatre, church
- Stage wash
- Wedding
- Exhibition lighting

Accessories:



Photometric


R(lx)	1190	476	302	189	127	93	83	59	55
G(lx)	1920	856	526	331	228	169	139	114	93
B(lx)	487	239	143	87	62	46	37	29	27
W(lx)	2750	1230	752	473	329	244	195	159	127
Full on(lx)	6230	2780	1670	1050	699	526	438	334	289

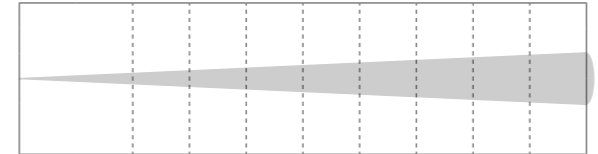

Distance(m)	2	3	4	5	6	7	8	9	10
Spot Diam(m)	0.89	1.33	1.77	2.22	2.66	3.10	3.55	3.99	4.43

Min. Spot-25°

R(lx)	142	79	69	58	25	16	12	9	7
G(lx)	254	134	126	87	38	27	19	16	13
B(lx)	68	36	33	27	19	13	8	7	5
W(lx)	372	189	169	121	56	39	36	25	19
Full on(lx)	765	395	365	270	112	86	66	57	39

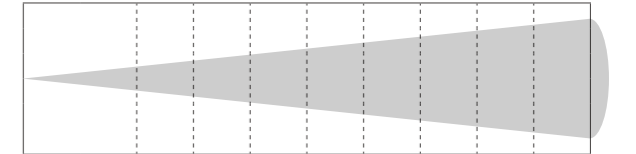

Distance(m)	2	3	4	5	6	7	8	9	10
Spot Diam(m)	3.30	4.95	6.60	8.25	9.90	11.55	13.20	14.85	16.5

Max. Spot-80°

Technical Data

Power supply:	AC100-240V, 50/60Hz
Light source:	150W RGBW LED
Color mixing:	RGBW
Color temperature:	3000K~8000K
Zoom range:	25°- 80° manual zoom
Power connection:	IP power cable in&out
Signal connection:	3-pin XLR in&out(5-pin optional)
Control channels:	ARC.1(3CH), AR1.D(4CH), ARC.2(4CH), AR2.D(5CH), AR2.S(6CH), HSV(3CH), STAG(11CH)
Control mode:	DMX, RDM, Auto

Dimmer speed:	4 grade
Housing:	Colour black, Aluminum
Size:	290 x 260 x 305mm
Package(carton):	290 x 290 x 350mm
N.W.:	5 kg(barn door incl.)
G.W.:	5.6 kg
Accessories(incl.):	Power cable, barn door, gel frame
Accessories(opt.):	Clamp, safety rope
Environment:	IP20

THEATRICAL LIGHTING

THEATRICAL LIGHTING