



S20T is a tiny 20W tunable COB LED profile spot. Die-casting housing, fan-free design. With 19°, 26°, 36°, 50° lens optional, and portable, track mount version selectable. It's an idea product for art gallery, Museum, Shopping mall.


Key features:

- 20W WW+20W CW constant COB LED, high lumen
- 2700K- 6000K color temp adjustable
- High CRI of 92
- Even wash of light
- Die-casting aluminum housing, fan-free
- 19°, 26°, 36°, 50° lens selectable
- Smooth dimming, flicker free
- Compact body, easy to set up

Application:

- Museum
- Theatre, chruch
- Shopping mall
- Art gallery
- Restaurant

Accessories:



Gel frame Gobo holder E sized (opt.)


S20T

20W tunable LED profile spot



Photometric


WW(lx)	2840	739	357	195	141
CW(lx)	4090	1110	496	251	191
Full on(lx)	3690	994	451	237	174

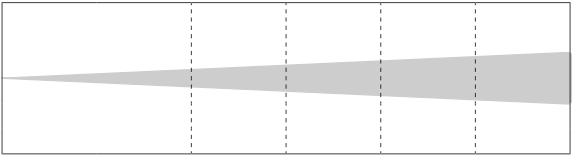

Distance(m)	1	2	3	4	5
Spot Diam(m)	0.33	0.71	1.06	1.41	1.76

19°

WW(lx)	811	242	113	76	47
CW(lx)	1140	339	156	92	69
Full on(lx)	1030	292	143	90	60

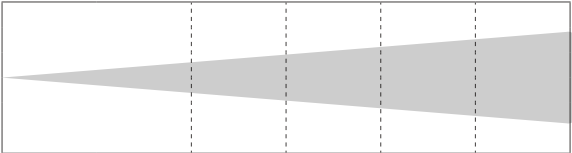


Distance(m)	1	2	3	4	5
Spot Diam(m)	0.65	1.38	2.07	2.75	3.44

26°

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	20W WW + 20W CW
Color temperature:	2700K - 6000K adjustable
Fixed lens:	19°, 26°, 36°, 50° optional
Color Rendition:	CRI 92
Power connection:	Dedicated power in
Signal connection:	3-pin XLR in & out
Control channels	1/2/3/5


WW(lx)	1936	527	253	139	107
CW(lx)	2700	764	357	189	134
Full on(lx)	2450	706	307	172	127

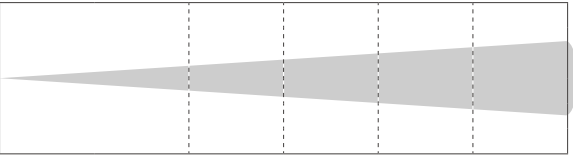

Distance(m)	1	2	3	4	5
Spot Diam(m)	0.46	0.85	1.28	1.70	2.13

36°

WW(lx)	581	174	81	52	47
CW(lx)	843	232	116	75	53
Full on(lx)	477	211	103	65	52

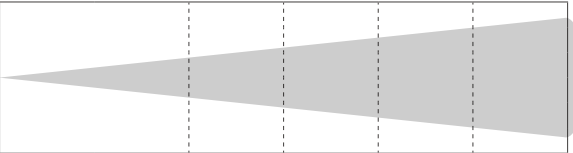

Distance(m)	1	2	3	4	5
Spot Diam(m)	0.93	1.87	2.80	3.73	4.66

50°

Control mode:	DMX, track mount version optional
Housing:	Color black or white, die-casting aluminum
Size:	343.7 x 133 x 131mm
N.W.:	1.7 kg
Accessories(incl.):	Power cable, Gel frame, Safety rope
Accessories(opt.):	Glass gobo holder E sized, Clamp
Environment:	IP20