



# GLORY 300

WW / CW

300W LED profile zoom



The Glory 300 is designed to replace the 1K Tungsten Halogen profile light. Zoom scale ranges from 15° to 30°. The COB chip creates a flat and even field of light and HD optics brings crisp pattern projection. Aluminum housing makes it durable and rental companies.


### Key features:

- 300W COB white LED
- CRI 97, R9≥90, TLCI up to 98
- HD optical system, clean shutter cuts beam
- 15 - 30° zoom range
- 16 bit dimming via DMX
- Flicker free operation
- 1.2 - 20.0KHz dimmer frequency
- Rotary, key, DMX control of dimmer
- Silent operation for studio and theatre use
- Conform with D-sized gobo


### Application:

- Broadcast, HD studio
- Theatre, church
- Fashion show
- Museum
- Exhibition lighting

### Accessories:





Gel frame




Gobo holder(optional)



### Photometric

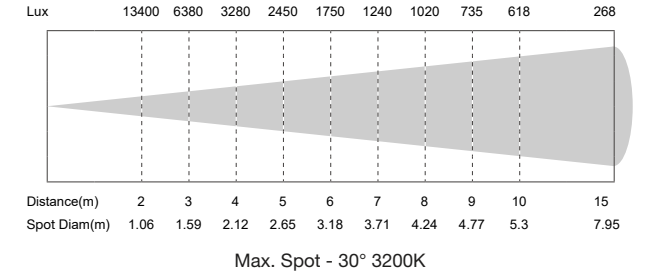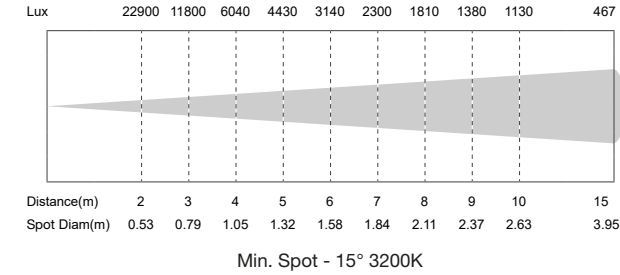

### Color Rendition

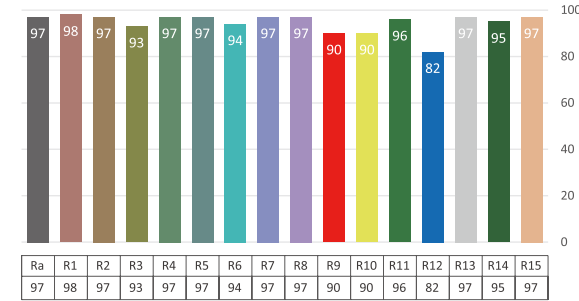

### Technical Data

Power supply:	AC100-240V, 50/60Hz
Light source:	300W COB LED
Color temperature:	3200K or 5600K
Zoom range:	15° - 30°
Color Rendition:	CRI 97, R9≥90, TLCI 98, CQS 94
Power connection:	PowerCON in & out
Signal connection:	3-pin XLR in & out(5-pin opt.)
Control channels:	1/2/3
Control mode:	Rotary, DMX, RDM

Housing:	Color black, aluminum
Size:	785 x 294 x 294mm
Package(carton):	790 x 350 x 360mm
N.W.:	11 kg
G.W.:	13 kg
Accessories(incl.):	Power cable, gel frame, Safety rope
Accessories(opt.):	Gobo holder, Clamp
GOBO Holder:	D-sized gobo holder
Environment:	IP20

THEATRICAL LIGHTING

THEATRICAL LIGHTING