



EVENT 200C

200W RGBL LED fresnel manual zoom

Event 200C is a 200Watt powered LED fresnel with zoom function. The RDM-DMX compliant, 25 - 65 degree manual zoom along with its even and flat RGBW color mixing make this fixture a good replacement for the traditional fresnels and more color option compare to white LED fresnel.


Key features:

- 200Watt LED source
- RGBL color mixing
- High CRI over 80(CT channel)
- Soft and even wash effect
- 25° - 65° manual zoom
- Smooth dimming, flicker free
- DMX and RDM controls
- Light weight, super compact size
- Barndoor included for shape of light
- Powercon in out connection


Application:

- Theatre, church
- Film shooting
- Exhibition lighting

Accessories:



Barn door




Gel frame



*No knob control for Event 200C


Photometric

R(lx)	594	243	134	108	71	55	44	40	32
G(lx)	966	442	227	181	101	93	79	64	52
B(lx)	209	93	52	42	30	26	22	19	17
W(lx)	1190	524	275	215	149	117	92	75	39
Full on(lx)	2780	1090	631	491	330	256	195	164	109


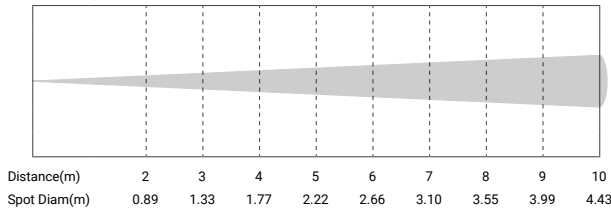


Minimum Spot

R(lx)	204	89	56	45	33	27	22.3	18.4	17.4
G(lx)	372	160	99	76	57	44	36	29	26
B(lx)	78	37	25	19	16	15	13.6	12	11
W(lx)	431	188	116	90	65	50	41	35	29
Full on(lx)	1000	434	355	201	142	104	84	65	59

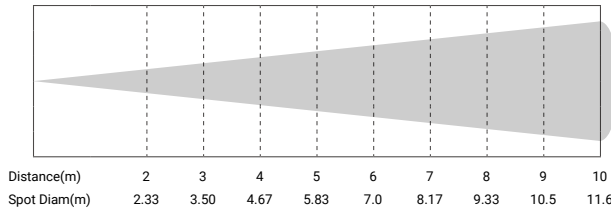

Maximum Spot



Technical Data

Power supply:	AC100-240V, 50/60Hz	Dimmer speed:	4 grade
Light source:	200Watt LED	Housing:	Colour black, Aluminum
Color mixing:	RGBL	Size:	300 x 200 x 195mm
Zoom range:	25° - 65° manual zoom	N.W.:	4.5 kg(barn door incl.)
Power connection:	PowerCON in out	G.W.:	6kg
Signal connection:	3-pin XLR in & out(5-pin optional)	Accessories(incl.):	Power cable, barn door, gel frame, safety rope
Control channels:	ARC.1(3CH), AR1.D(4CH), ARC.2(4CH), AR2.D(5CH), AR2.S(6CH), HSV(3CH), STAG(11CH)	Accessories(opt.):	Clamp
Control mode:	DMX and RDM controls	Environment:	IP20